


'DIFFERENT
MOBILE LANE
SIGNALING SYSTEMS
AVAILABLE'

CE
RIS SYSTEM

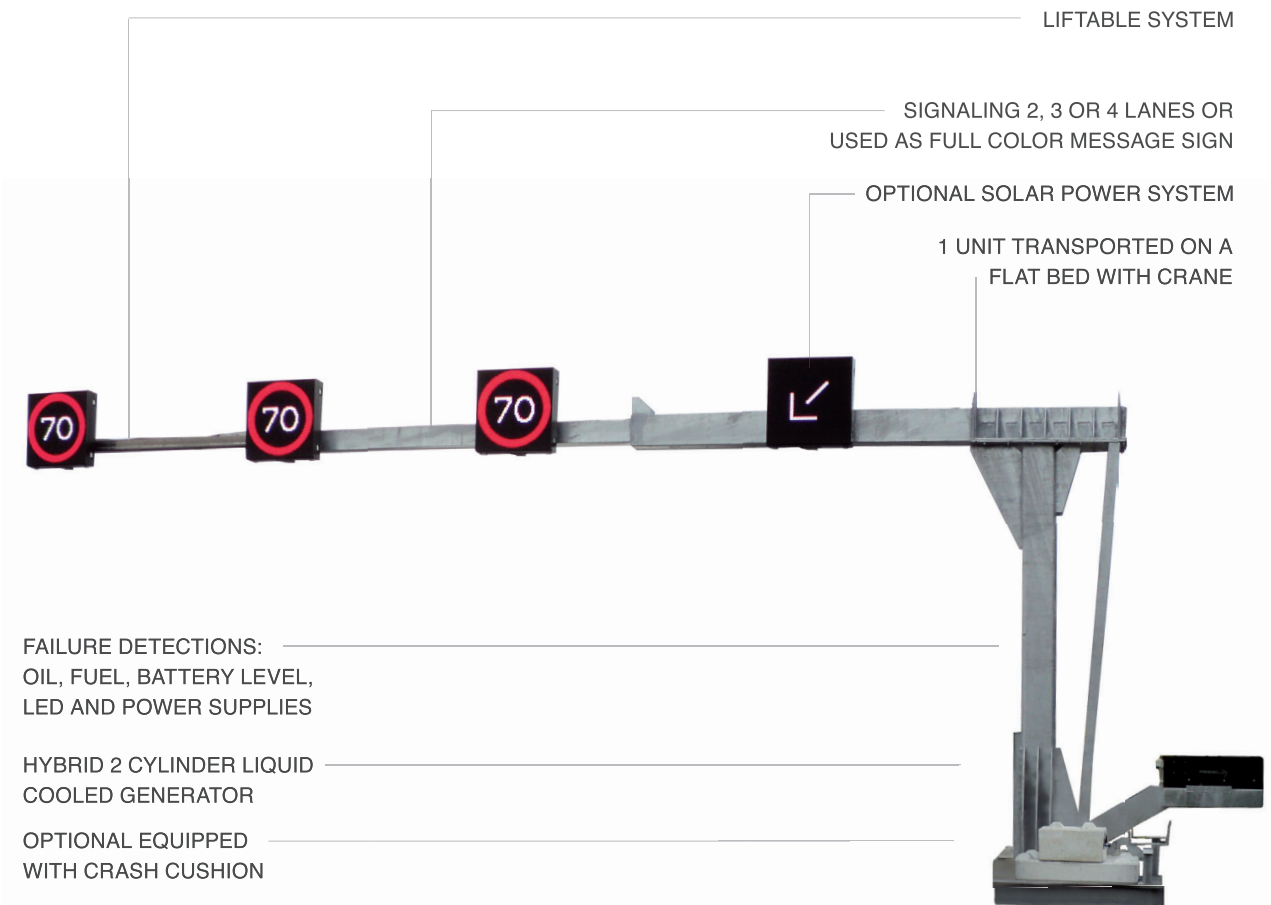

FAILURE DETECTIONS:
OIL, FUEL, BATTERY LEVEL,
LED AND POWER SUPPLIES

HYBRID 2 CYLINDER LIQUID
COOLED GENERATOR

OPTIONAL EQUIPPED
WITH CRASH CUSHION

OPTICS ACC. NEN-EN 12966
EMC TESTED (ELECTROMAGNETIC COMPATIBILITY)
WIFI OR UMTS WIRELESS COMMUNICATION

± 10.000 KG

